

Electronic Cruise Control for BMW R1200GS ABS-3 late 2007 to 2008



NOTE: - This cruise control will fit late '07 and '08 model bikes fitted with non-servo assisted Integral ABS brakes. See ABS version notes on page 3.

It will **NOT** fit bikes with ESA (electronic suspension adjustment) and will **NOT** fit bikes with LED tail/brake lights.

This cruise control will **NOT** fit any bikes fitted with an Evaporative Emissions Carbon Canister. The carbon canister is mounted on the left side of the bike, beside the rear spring/damper (shock absorber). The canister must be either moved or removed in order to fit the cruise control, or the cruise control actuator must be mounted in a different location.


The following provides a brief description of the power consumption and component locations of the MotorCycle Setup electronic cruise control. Installed weight of the cruise control is approximately 2.5kg

Current draw while the cruise is switched on, but not engaged, is approximately 0.250 amp (3 watts). Current draw while the cruise is engaged is nominally 0.50~0.80 amp (6~10 Watts).

By comparison, a head light bulb typically draws about 4 amps (55 Watts), and a tail light bulb (running light) draws about 0.4 amp (5 Watts).

Refer to the line drawing on the back of this sheet to identify the components from the numbers in the text.

The **Computer (1)** mounts behind the steering head, between the back of the steering head and the fuel tank.

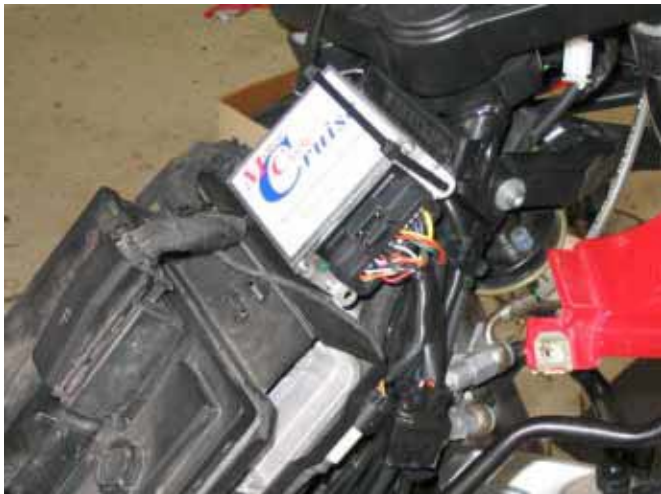

The **Actuator (2)** is clamped to the frame on the left side, next to the bike's rear suspension spring/damper (shock absorber). Satin Black (shown) or Silver Pearl (optional) powder coated aluminium covers are supplied to prevent dirt and water ingress into the actuator and to improve the appearance of the actuator. A **vacuum hose assembly (3)** is provided to connect the actuator to the engine.



NOTE; - If the bike is fitted with a Carbon Evaporative Emissions Canister, the actuator will **NOT** fit in this location. Either canister must be moved or removed, or the actuator moved to a different location.

O.W.L. Vehicle Electronic Systems Ltd
O.W.L. House PO Box 1330
TAMWORTH B77 1AG UK
tel +44(0)1827 60577 fax +44(0)1827 60579
www.motorcyclecruise.co.uk



2003/346

The bike's original throttle cable splitter box (throttle cable divider) is removed from the bike and our **Cable Interface Unit (4)** is fitted to the bike. No modifications to the bike's cables are required at all, it is a straight swap. A suitable mounting bracket is supplied to allow fitment of the CIU in the original cable splitter mount. See the previous page for a photo with the fuel tank removed.



The **Speed sensor (5)** is mounted below the right hand front brake caliper. The original caliper mounting bolt is removed and a new bolt and spacer washers fitted to allow the speed sensor to be mounted. Nickel-plated magnets are placed in the heads of the bolts that mount the brake disc.

The **Control Switch (6)** is mounted on the left hand (clutch) lever mirror mount. The switch is located just above the left switch block.



To ensure that the cruise control installation is as safe as possible, an additional **hydraulic pressure switch (7)** is fitted to the bike's front brake circuit. This is to provide a back up method of disengaging the cruise control in the event of failure of the bike's brake light circuit. Fitment of this switch involves replacing one of the brake line 'banjo' bolts with a new bolt that has a pressure switch built in to it. Depending on what ABS version the bike is fitted with, the switch may be fitted either at the handle end of the front brake lever hose (as shown), or at the other end of the front brake lever hose.

O.W.L. Vehicle Electronic Systems Ltd
 O.W.L. House PO Box 1330
 TAMWORTH B77 1AG UK
 tel +44(0)1827 60577 fax +44(0)1827 60579
www.motorcyclecruise.co.uk



2003/346

Disc brake mounting bolts on current BMW motorcycles.

We are aware of three different type heads in disc brake mounting bolts on current model BMW motorcycles.

All models that we are aware of from mid '90's to 2007 use this 'button' (rounded) head bolt. The recess in the head of this bolt is a T-40 'Torx' fitting and the magnets we have to fit this are 4.75mm diameter x 4.75mm long. We have seen this bolt in various models, R1100RT, R1150RT, R1150GS, R1100S, K1100RS, K1100LT, R1200GS, R1200S, K1200S, F800ST.


Note that these bolts are used in earlier designs that bolt a disc carrier to the wheel and the discs then are allowed to 'float' on the carrier and also later models as shown here with the disc bolted to the wheel without a carrier, but there are spring washers on the bolt to allow the disc to 'float'.



Some current (2008) bikes have flat head bolts. The recess in the head of this bolt is a T-30 'Torx' fitting and the magnets we have to fit this are 4mm diameter x 5mm long. We have seen this bolt on the new (late 2008) R1200GS.



We have recently seen this new bolt, also a T-30 'Torx' fitting and uses the 4mm diameter x 5mm long magnet. We have seen this on a new (2009) F800GS. This design has gone back to the earlier practice of having a disc carrier bolted to the wheel and then the disc 'floats' on the carrier.

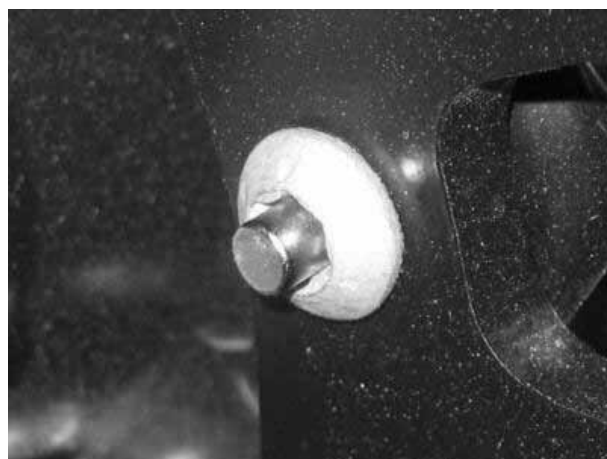

This kit for this model R1200GS comes with magnets to fit the first bolts (round head T-40). If your bike has different size bolts, please let us know.

O.W.L. Vehicle Electronic Systems Ltd
O.W.L. House PO Box 1330
TAMWORTH B77 1AG UK
tel +44(0)1827 60577 fax +44(0)1827 60579
www.motorcyclecruise.co.uk



2003/346